


AT4 Four-Wire Resistive

For Small Form Factor Applications

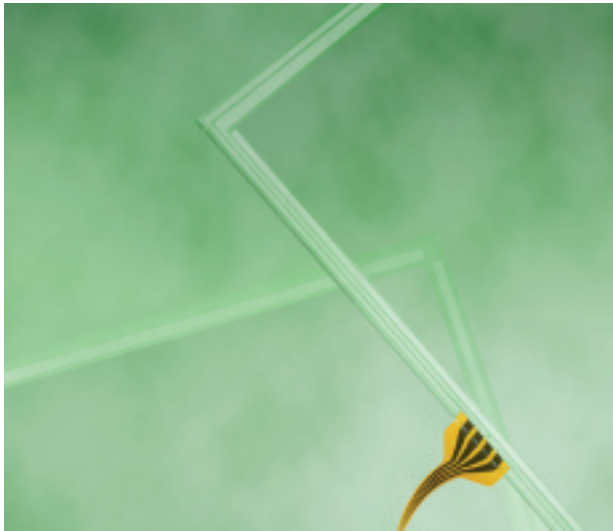

Elo's AT4 four-wire resistive touchscreens are the cost-effective touch solution for small form factor applications while providing reliability, low power consumption, and narrow border width. The AT4 touchscreens enable broad input flexibility, with finger, gloved hand, or stylus activation, and it's the ideal touch solution for portable devices, office automation, light industrial automation, medical equipment, and consumer products. The AT4 four-wire resistive touchscreens are another quality product from Elo TouchSystems, the complete touch solutions provider.

Benefits

- Cost-effective
- Low power consumption
- Narrow border width
- Broad input flexibility
- Backed by Elo

Applications

- Portable devices
- Office automation
- Light industrial automation
- Medical equipment
- Consumer products

AT4 Four-Wire Resistive

MECHANICAL

Input Method	Finger, gloved hand, or stylus activation
Available Sizes	5.7" to 10.4"; visit our Web site for full specifications and other offerings

ELECTRICAL

Positional Accuracy	1.5% or less
Resolution	Touchpoint density is based on controller resolution of 4096 x 4096
Touch Activation Force	Typically 80 grams
Controller	Board: Serial (RS232) and USB Chip: Serial (RS232) and USB

OPTICAL

Light Transmission	78% or more
--------------------	-------------

ENVIRONMENTAL


Temperature	Operating: 0°C to 50°C Storage: -20°C to 70°C
Relative Humidity	Operating: 0°C to 50°C, 70% RH or lower, noncondensing Storage: -20°C to 70°C, 90% RH or lower, noncondensing
Agency Approvals	UL, TÜV
Sealability	Can be sealed to meet NEMA 4 and 12 and IP65 standards

DURABILITY

Surface Durability	3H per JIS K5400
Expected Life	Operationally tested to 1 million touches in one location without failure
Warranty	Touchscreen: 1-year limited warranty Controller: 5-year limited warranty



2216 combo controller board

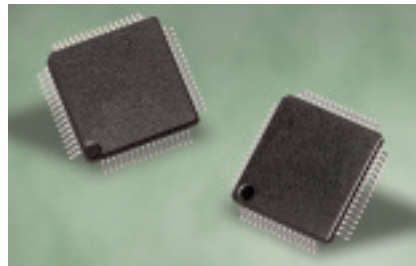

COACH III combo controller chip

Find out more about Elo's extensive range of touch solutions. Go to www.elotouch.com, or simply call the office nearest you.

Corporate Headquarters

Elo TouchSystems
301 Constitution Drive
Menlo Park, CA 94025-1110

800-ELO-TOUCH

Tel 1-650-361-4700
Fax 1-650-361-4747
eloinfo@elotouch.com

Europe Headquarters

Tel +32 (0)16 35 21 00
Fax +32 (0)16 35 21 01
elosales@elotouch.com

Asia-Pacific Headquarters

Tel +81 (45) 478-2161
Fax +81 (45) 478-2180
www.tps.co.jp

Latin America Headquarters

Tel 1-305-428-5210
Fax 1-305-717-4909
www.elotouch.com.ar

Elo TouchSystems reserves the right to change or update, without notice, any information contained herein; to change, without notice, the design, construction, materials, processing or specifications of any products; and to discontinue or limit production or distribution of any products.

AT4, COACH and Elo TouchSystems and IntelliTouch are trademarks of Tyco Electronics Corporation. All other trademarks are the property of their respective owners.
Copyright 2006 Tyco Electronics Corporation ELO-147 3/06